PLAINTIFF'S EXHIBIT

UC-3974

Calidria ASBESTOS

UNION CARBIDE CORPORATION · METALS DIVISION · P. O. BOX 579 · NIAGARA FALLS, N.Y. 14302 · TEL: 716-278-3376

THICKENING AGENTS FOR NITROCELLULOSE AND ALKYD LACQUERS

The information on the following pages is a translation of work done in the laboratories of our European Distributor. RG-244 is compared to Bentone 27, 34 and 38.

A07885

Union Carbide trial exhibit UC-3974: Calidria RG-244 Compared to Bentone 27, 34 and 38 as Thickening Agents for... Published by AsbestosClaims.Law

ACL Doc 18604 · Page 1 of 7 asbestosclaims.law/library/18604/1

Bentone 27, 24 and 38 were tested together with RG-244 for their properties as thickening agents. An NC-lacquer and an alkyd-lacquer were used. From the Bentone-products a 10% paste was prepared in a mixture alcohol-xylol. The paste and the RG-244 were dispersed with a dissolver for 10 minutes at 2,000 r.p.m. All products could be dispersed very easily.

The concentrations of the thickening agents were:

in NC-lacquer	1.6%
in alkyd-lacquer	0.8%

After a 5-day storage test Bentone 27 in NC-lacquer showed a soft settlement, while all the other samples were perfectly stable.

As can be seen from the attached graphs, the thickening effect of RG-244 was much higher than that of the Bentone-types.

One obvious advantage of RG-244 is that it can be incorporated directly.

Recipe for the Bentone Paste

Bentone	10%
Methanol	10%
Xylol	75%
Anti-Terra U	5%

A07886

Union Carbide trial exhibit UC-3974: Calidria RG-244 Compared to Bentone 27, 34 and 38 as Thickening Agents for... Published by AsbestosClaims.Law
ACL Doc 18604 · Page 2 of 7 asbestosclaims.law/library/18604/2

Nitrocellulose Lacquer Formulation

Non-Polishable Flat Nitrocellulose Lacquer NC 223

Nitrocellulose, Normtype 24 E (wetted with 35 % Isobutanol) (WASAG-Chemie)	125.0
Heso-Alkyd 40 E, 60 % in Xylol (Hendricks und Sommer)	208.0
Palatinol BB (BASF) = butyl benzyl phthalate	16.6
Edenol 344 (Dehydag) = Dimethyl cyclohexyl phthalate	25.0
Silicone oil L 050 (Wacker) 10 % solution in MIBK	9.0
Methyl ethylketone	121.0
Methyl isobutyl ketone	152.0
Toluol	220.0
White spirits 100/140	86.4
Ethyl glycol acetat	37.0
	1000.0

A07887

Non volatile solid content: 25 %

Viscosity DIN 4 Cup 20 ^{o} C 90 Seconds

UCC.015030

Alkyd Lacquer Formulation

Polyurethane - Alkyd U 60


Alkydal U 6o (Bayer) 55 % on white spirit		913.2
Turpentine		1o.4
White Spirit K 3o		39.6
Nuodex Lead Octoate 24 % P 6	Gebr. Borchers AG	8.3
Nuodex Cobalt Octoate 6 % Co		3.3
Nuodex Calcium Octoate 4 % Ca		12.6
Ascinin R (Bayer)		12.6
		1ooo.o

A07888

52 % Weight solids


Viscosity 17o Seconds DIN 4 Cup 20 ° C

Union Carbide trial exhibit UC-3974: Calidria RG-244 Compared to Bentone 27, 34 and 38 as Thickening Agents for... Published by AsbestosClaims.Law
ACL Doc 18604 · Page 4 of 7 asbestosclaims.law/library/18604/4

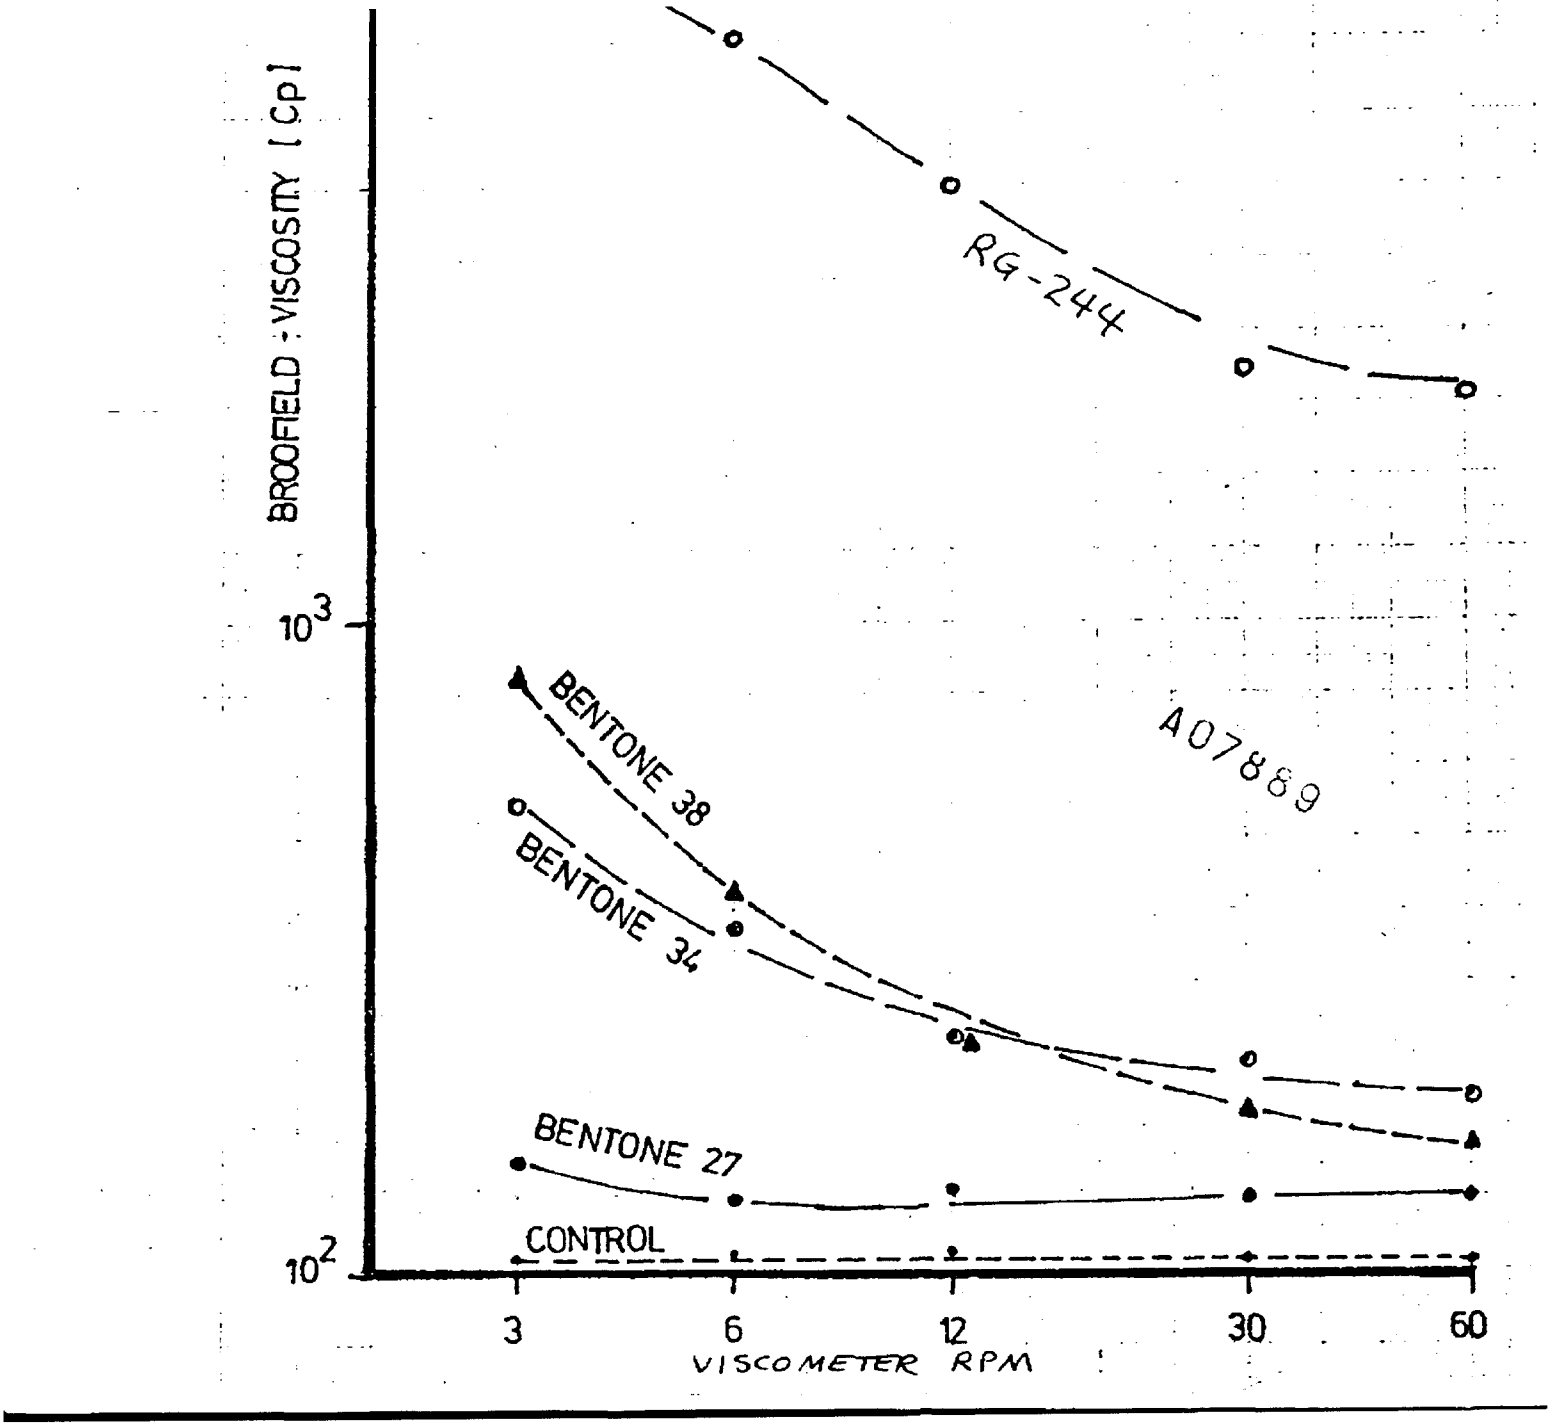

UCC 015032

Published by AsbestosClaims.Law
asbestosclaims.law/library/18604/5

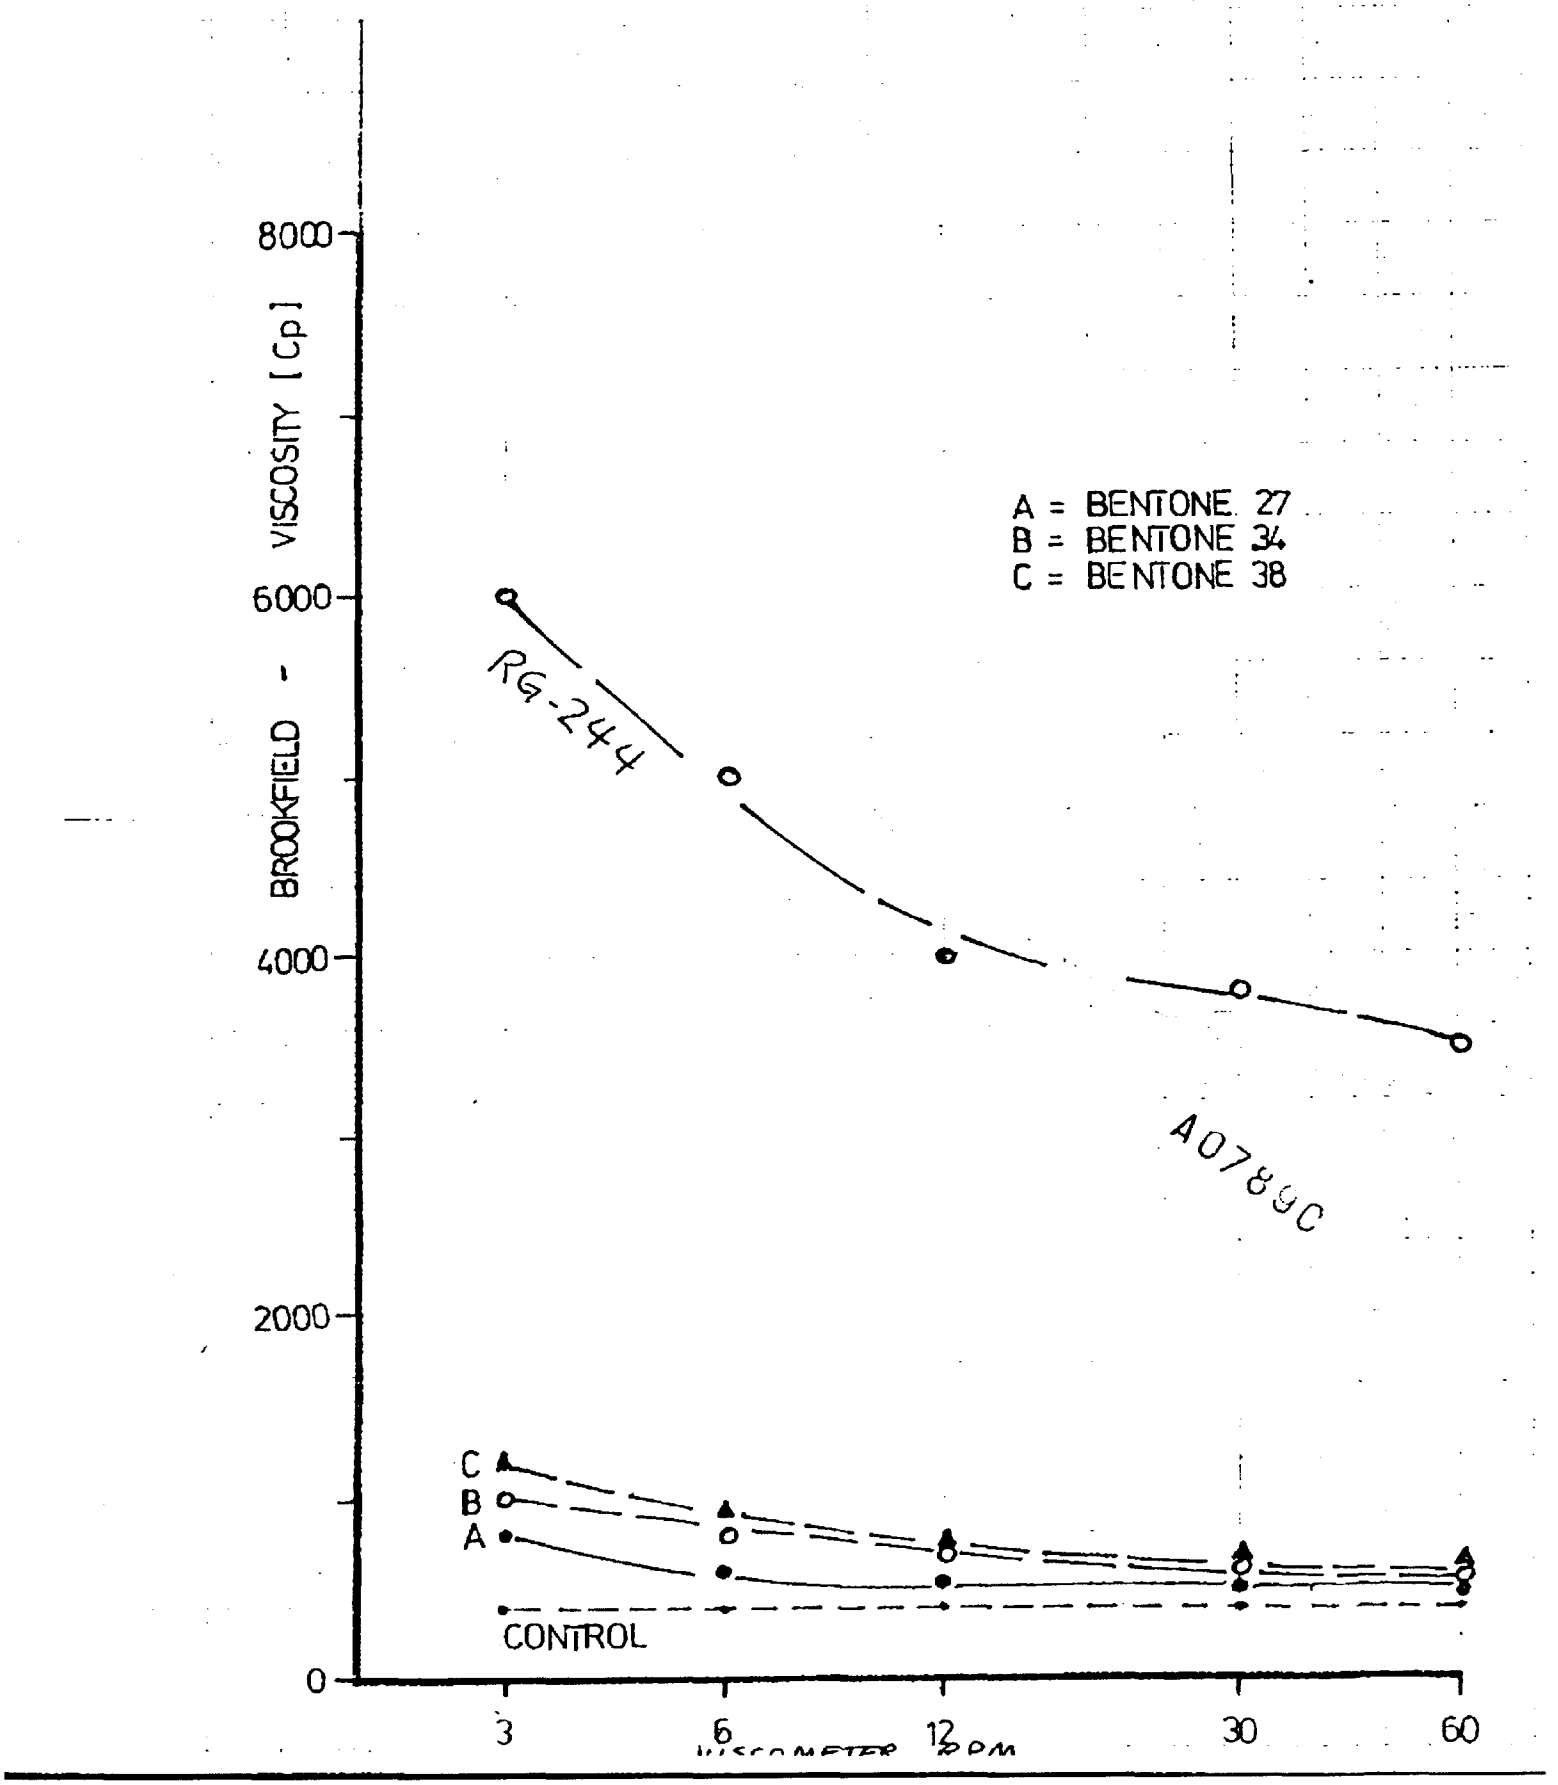
THICKENING AGENT AT 0.8% IN ALKYD RESIN
BROOKFIELD - VISCOSITY [Cp]
8000
6000
4000
2000
0
A = BENTONE 27
B = BENTONE 34
C = BENTONE 38
RG-244
A07890
C
B
A
CONTROL
3
6
12
30
60
RPM

UCC 015033

Published by AsbestosClaims.Law
asbestosclaims.law/library/18604/7